



Last Saved: 12/18/2025 7:24:21
Project: 05085-001-24-228 Dover HS Athletics Buildings - MEP R25.rvt
P:\HS & Gym\05085-001-24-228 Dover HS Athletics Buildings - MEP R25.rvt
By: W. LENTZ
Checked by: A. WILKINSON

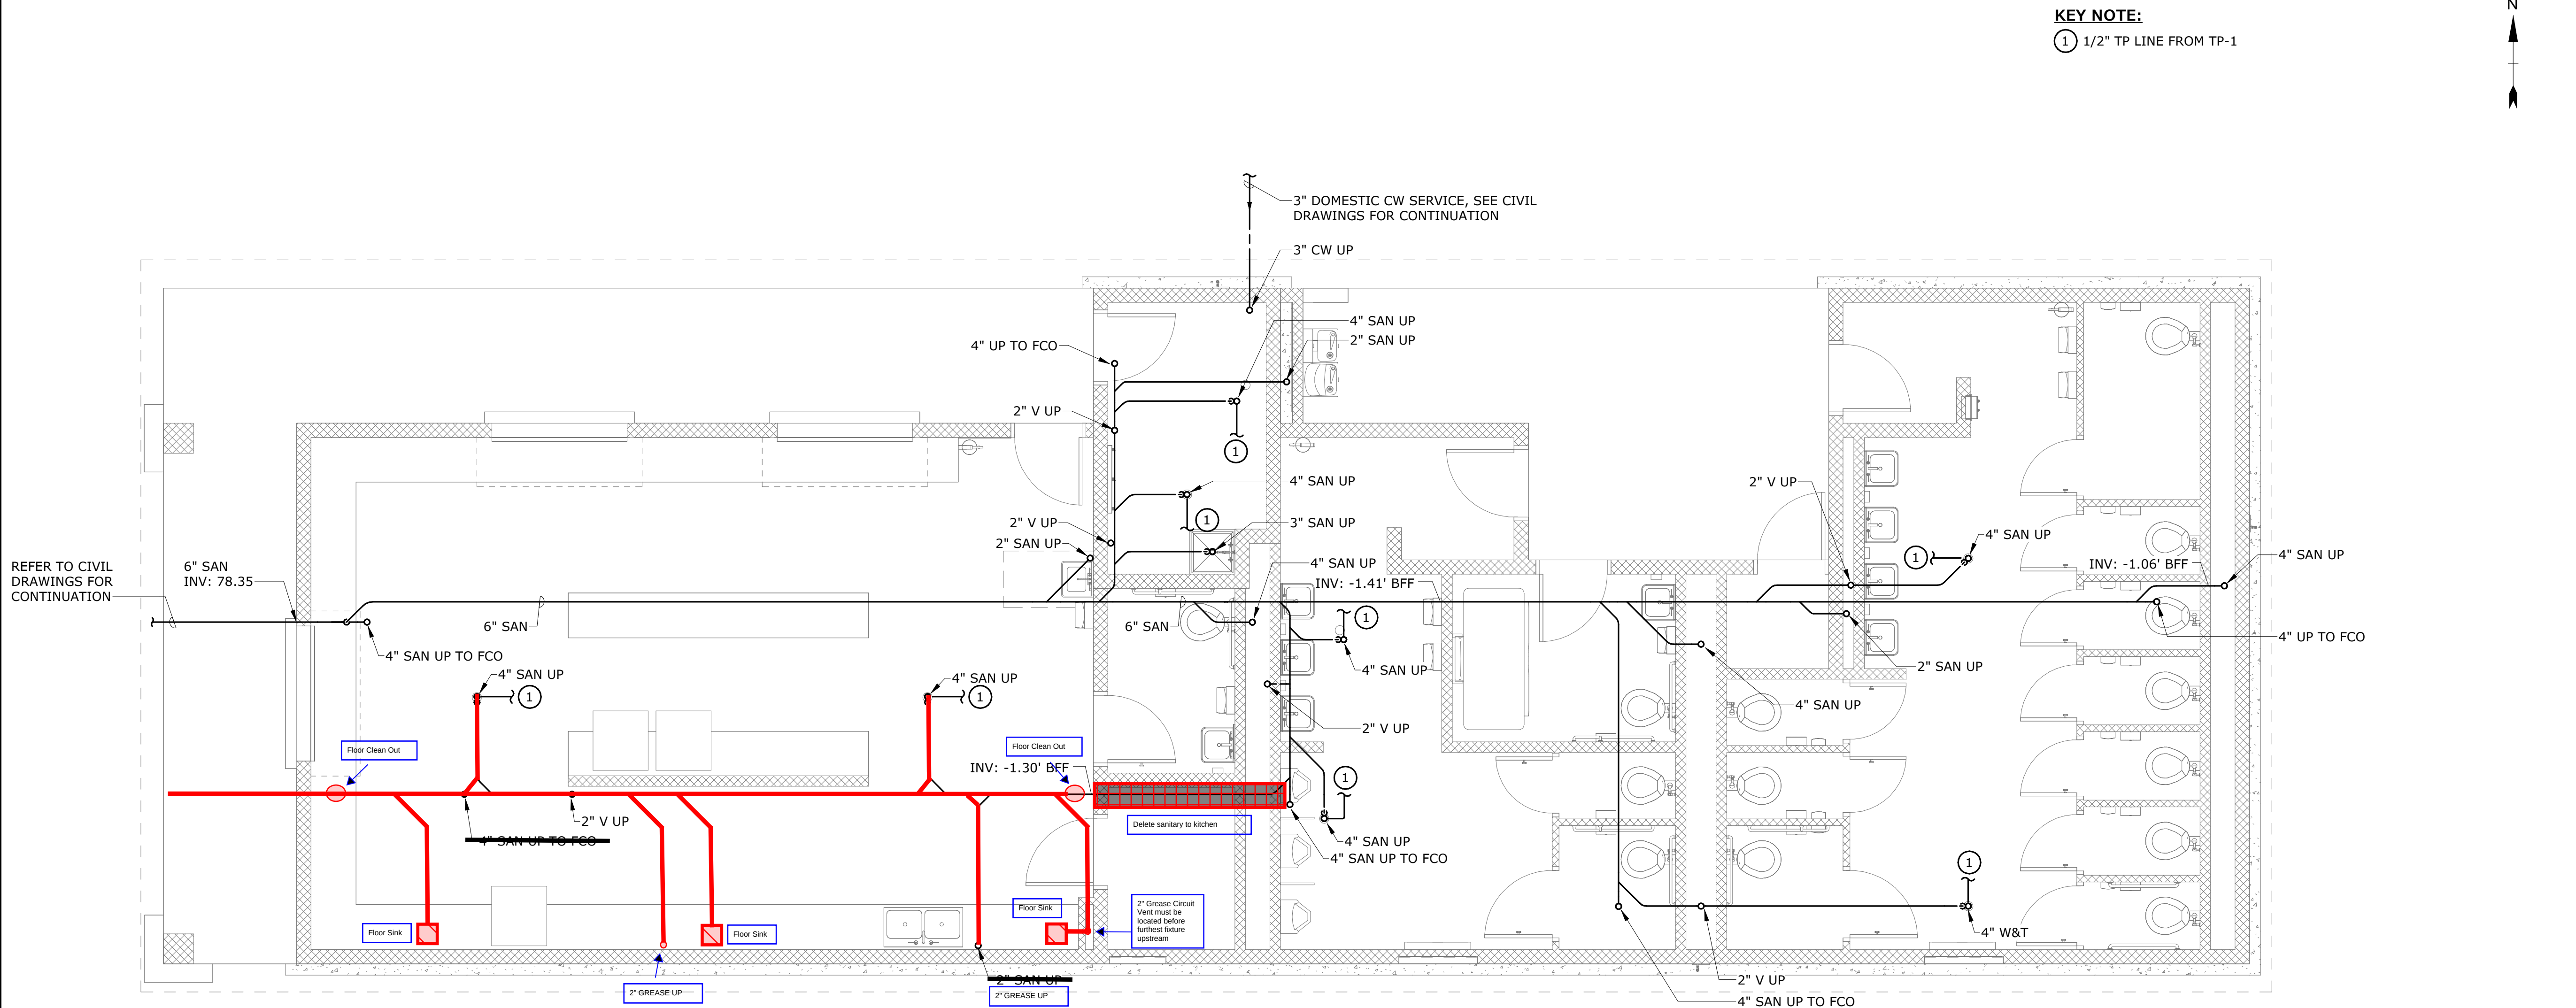



PLUMBING CONCESSIONS BUILDING UNDERGROUND PLAN
SCALE: 1/4" = 1'-0"

Proposed dedicated grease building drain to be no hub cast iron to receive potential hot water discharge at or above 140 degrees. Proposed Floor Sinks are added as indirect waste receptors that would be associated with proposed triple bowl sink, potential dishwasher, and potential prep sink. Floor drains will discharge into proposed grease building drain as they are located within the area of kitchen prep. It is our understanding as plumbing contractor that the grease interceptor installed by site contractor adequately protects the building sewer eliminating the need for a grease interceptor within the building.

Proposed by Rick Baron, Legacy Mechanical Services. (Plumbing Contractor) - Wednesday May 6, 2026

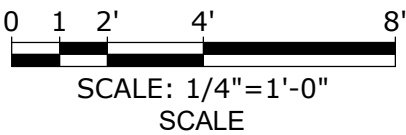

Tighe&Bond

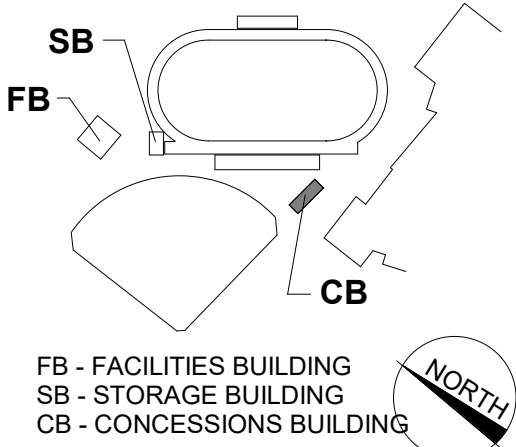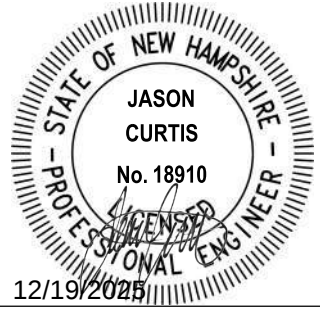

**PROGRESS SET
NOT FOR
CONSTRUCTION**

THIS DOCUMENT IS RELEASED
TEMPORARILY FOR PROGRESS REVIEW
ONLY. IT IS NOT INTENDED FOR BIDDING
OR CONSTRUCTION PURPOSES.

**Dover High
School Athletic
Facility Project**

Dover School
District, SAU #11

25 Alumni Drive
Dover, New Hampshire

MARK	DATE	DESCRIPTION
PROJECT NO:	D5085-0001	
DATE:	12/12/2025	
FILE:	D5085-0001-P-110	
DRAWN BY:	W. LENTZ	
DESIGNED BY:	W. LENTZ	
CHECKED BY:	A. WILKINSON	
APPROVED BY:	K. PRATA	

**PLUMBING CONCESSIONS
BUILDING UNDERGROUND
PLAN**

SCALE: AS SHOWN

P-110